



10dB

TYPE N • FIXED attenuators

DC-18 GHz (A900N) • DC-12 GHz (A700N)

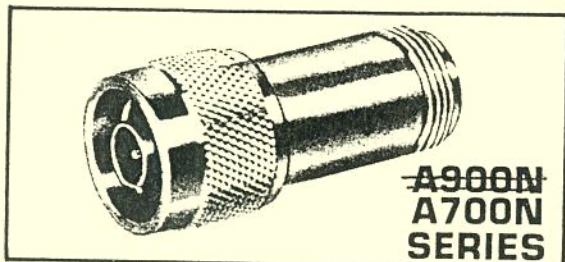


**A900N
A700N
SERIES**

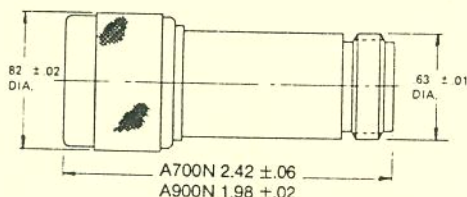


(PLASTIC SLEEVE)

**A900N SERIES
A700N SERIES**


MATES WITH TYPE 'N'
FEMALE CONN. PER
MIL-C-39012.



MATES WITH TYPE 'N'
MALE CONN. PER
MIL-C-39012.



TYPICAL MODEL NO.

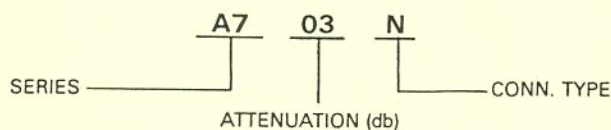

HIGH PERFORMANCE A900N SERIES OPTIONAL PLASTIC SLEEVE AS900N SERIES

GENERAL SPECIFICATIONS

Frequency Range: DC-18 GHz
 Impedance: 50 Ohms
 Material: Passivated Stainless Steel
 Connectors: Type N m/f, MIL-C-39012
 Temperature Range: -55°C + 125°C
 Power: 2 WCW @ 25°C, 200 Watts Peak
 Standard Values: 3, 6, 10, 15, 20 & 30 db
 (other values available)

PLASTIC SLEEVE COLORS OPTIONAL FOR "AS" SERIES ONLY

MODEL AS903N- WHITE 3db
 AS906N- BLUE 6db
 AS910N- TAN 10db
 AS920N- RED 20db

A900N SERIES ACCURACY & VSWR

Frequency (GHz)	Accuracy (±db)			Max. VSWR
	1-10 db	11-20 db	21-30 db	
DC-8	0.3	0.5	1.0	1.15
8-12	0.3	0.5	1.0	1.25
12-18	0.3	0.5	1.0	1.35

LOW COST A700N SERIES OPTIONAL PLASTIC SLEEVE AS700N SERIES

GENERAL SPECIFICATIONS

Frequency Range: DC-12.4 GHz
 Impedance: 50 Ohms Nominal
 Material: Passivated Stainless Steel
 Connectors: Type N m/f, MIL-C-39012
 Temperature Range: -55°C + 125°C
 Power: 2 WCW max.
 Peak: 1 KW
 Standard Values: 1-6, 10, 15, 20 & 30 db
 Model AS700N available in 10, 20 & 40 db values only as standard

PLASTIC SLEEVE COLORS OPTIONAL FOR "AS" SERIES ONLY

MODEL AS710N- TAN 10db
 AS720N- RED 20db
 AS740N- YELLOW 40db

Frequency (GHz)	Accuracy (±db)		Max. VSWR	
	(0-9 db)	(>9 db)	(0-9 db)	(>9 db)
DC-12.4	0.6	1.50	1.5	1.35



Im Gewerbepark 11
 27619 Schiffdorf
 Tel. 04706/750100
 Fax 04706/750103